


SPECIAL NOTICE : REAR RACK INSTRUCTIONS

CAUTION : Maximum load on racks is 11 lbs

① SPRING WASHER	$\phi 8.5 \times 13.3$
② Large WASHER	$\phi 8 \times 32$
③ Small WASHER	$\phi 8.5 \times 23$
④ RUBBER WASHER	$\phi 20 \times 8.2 \times 2$
⑤ SPACER	$\phi 9 \times 19 \times 9.5$
⑥ Flange nut	M8*1.25P
⑦ BOLT	M8*1.25P*45

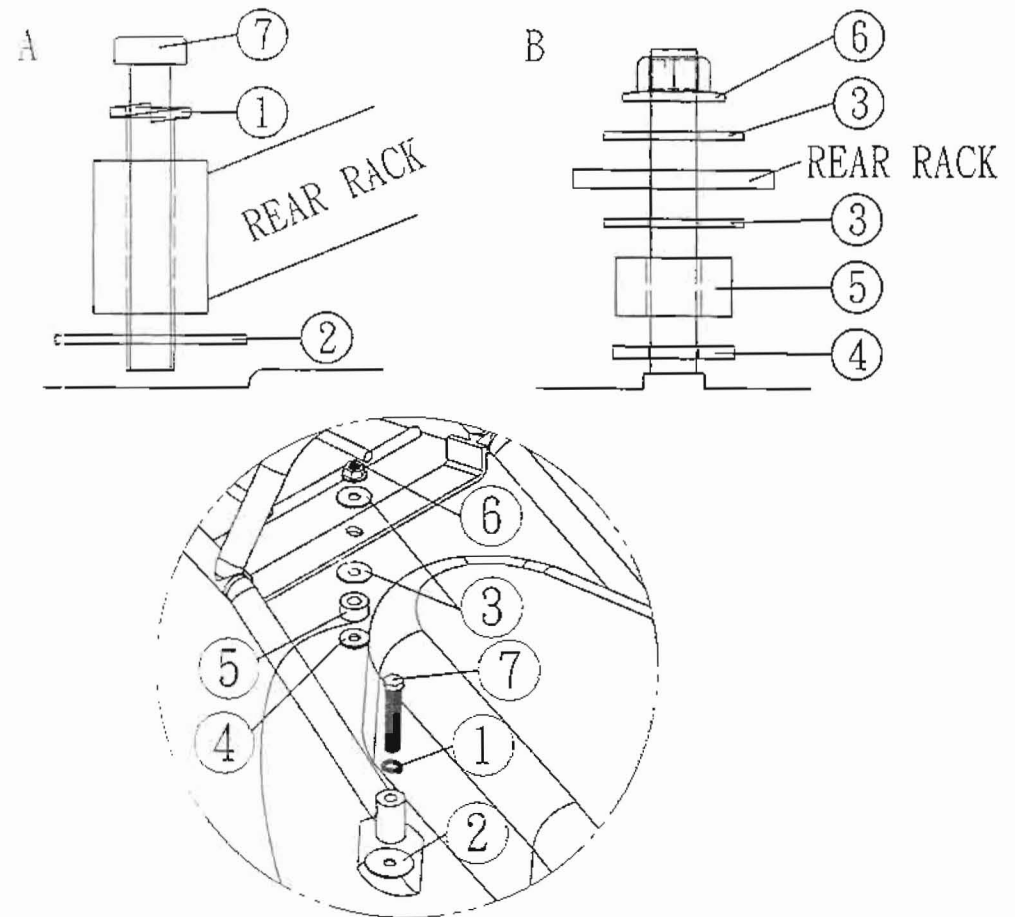

STEP 1 : PUT THE PARTS ③ ⑤ ④ IN PROPER POSITION ON THE CENTER

STEP 2 : PUT THE RACK WITH THE SPARE PARTS IN PROPER POSITION

STEP 3 : TIGHTEN BOLT ⑦

STEP 4 : TIGHTEN REAR NUT ⑥