


# Instructions for Mounting Rear Racks RRC1, RRC2, RRC3


1. Remove Seat Check Pin if your scooter has one.






2. On Largeframe scooters remove the two Rear Gas Tank Bolts.



3. Move the rack to the back of the scooter, bolting down the tongue of the rack with the bolts you removed above. Replace Check Pin.

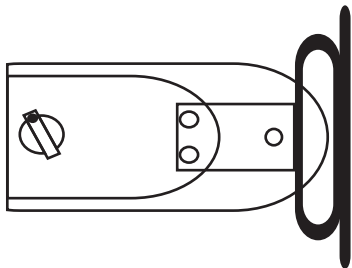

4. Hang the provided hooks on the bottom bar of the rack.

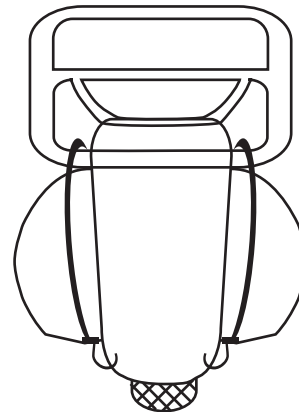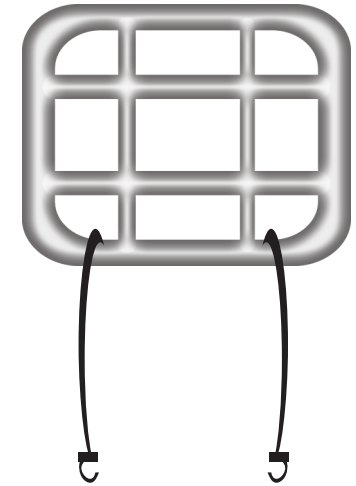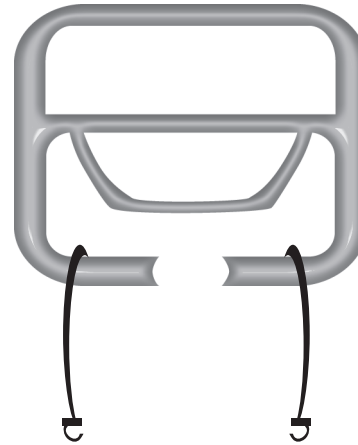

5. Hook the brackets at the bottom of the hooks under the lower edge of your scooter & frame. Hand tighten the nuts until the rack sits firm and even. Then tighten with a wrench.